



CUSTOM MADE LCD WITH COG (Chip-On-Glas) DRIVER

1. LCD Dimensions

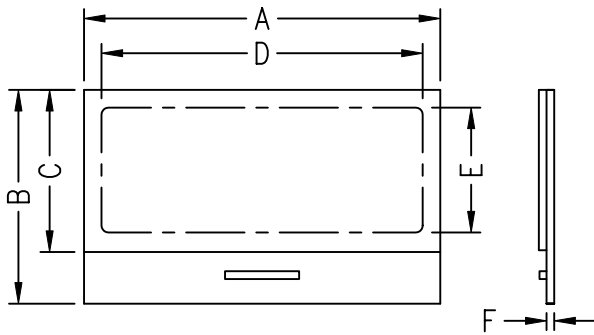

A: Length				mm
B: Width				mm
C: Width				mm
D: Length viewing area				mm
E: Width viewing area				mm
F: Glass Thickness	1,1 mm	0,7 mm	0,55 mm	
Pin-Pitch:	2,54 mm	2,0 mm	1,8 mm	
Pin-Length:	6,35 mm			mm
FPC-Pitch :	0,5 mm			
FPC-Length:				mm

2. LCD Configuration

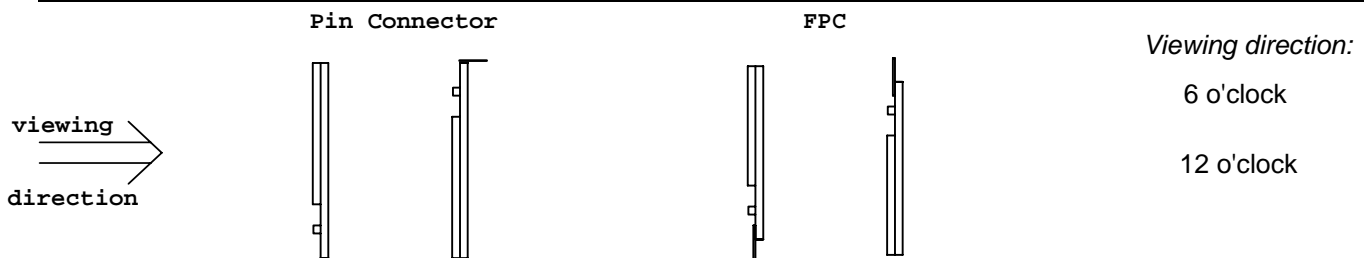

3. Electrical Characteristics

Type:	TN (grey)	STN	(yellow-green, grey-blue, blue)			
		FSTN	(black/white)			
Drive Method:	static	MUX:		Voltage:	V	
Display Mode:	reflective	transflective	transmissive			
	positive	negative				
Temperature Range:	Operating Temperature	0°C bis +50°C	-	°C bis +	°C	
	Storage Temperature	-20°C bis +70°C	-	°C bis +	°C	
Backlight:	yes	no				
Color:	white	blue	green	yellow-green	red	other
Backlight Mode:		LED	EL	CCFL		
Application:	indoor	outdoor	UV-Protection			
Soldering Methode (Pins):		wave-soldering	hand-soldering			

4. Contact

Quantity: pcs. / year Field of Application:

Name: Company:

Phone: e-mail: