



CUSTOM MADE LCD

1. LCD Dimensions

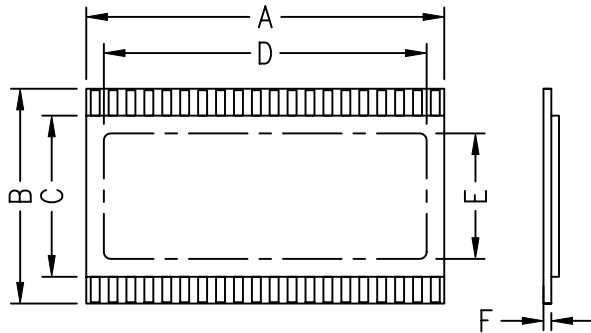

A: Length			mm
B: Width			mm
C: Width			mm
D: Length viewing area			mm
E: Width viewing area			mm
F: Glass Thickness	1,1 mm	0,7 mm	0,55 mm
Pin-Pitch:	2,54 mm	2,0 mm	1,8 mm
Pin-Length:	6,35 mm		mm
FPC-Pitch :	0,5 mm		
FPC-Length:			mm

2. LCD Configuration

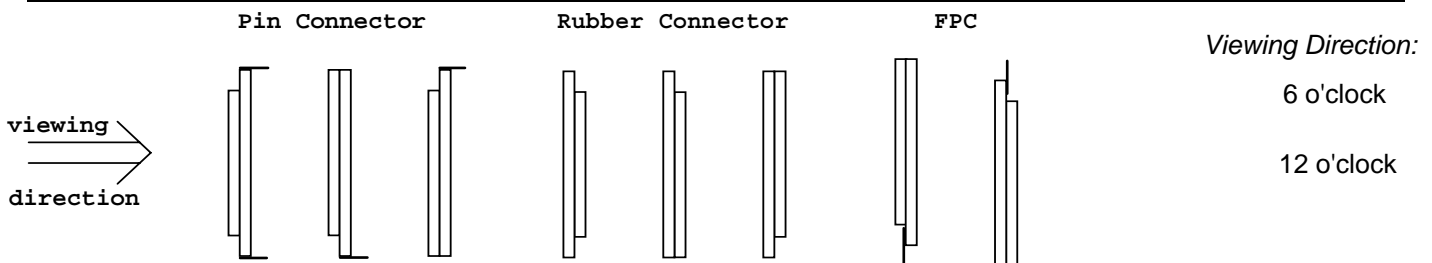

3. Electrical Characteristics

Type:	TN (grey)	STN	(yellow-green, grey-blue, blue)
	HTN (grey)	FSTN	(black/white)
Drive Method:	static	MUX:	BIAS: Voltage: V
Display Mode:	reflective	transflective	transmissive
	positive	negative	
Temperature Range:	Operating Temperature	0°C bis +50°C	- °C bis + °C
	Storage Temperature	-20°C bis +70°C	- °C bis + °C
Backlight:	yes	no	
Color:	white	blue	green yellow-green red other
Backlight Mode:		LED	EL CCFL
Application:	indoor	outdoor	UV-Protection
Soldering Method (Pins):		wave-soldering	hand-soldering

4. Contact

Quantity: pcs. / year Field of Application:

Name: Company:

Phone: e-mail: